

CONSTANT PRESSURE ARMCHAIR | SOFA | PUFF VENTO®

INCLUDED



x 1


transport bag




x 1

valve key


ASSEMBLY INSTRUCTIONS

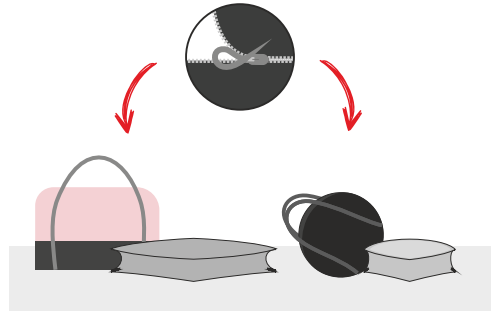


1 Remove the product from the cover and place it on a clean, dry surface.

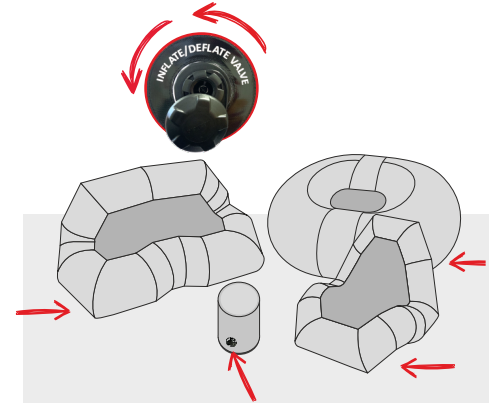


2 Find the inflate/deflate valve to inflate and unscrew the nut.

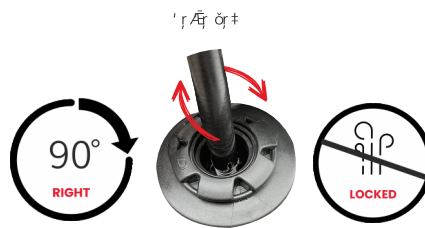

3 Lock the valve by turning the diaphragm needle about 90° clockwise with the dedicated key, this prevents air escape. An unblocked valve will escape air from the product!

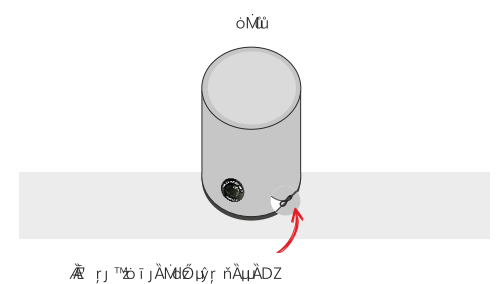


4 Check that the bottom cover zipper around the pouffe is fastened. On sofas and armchairs, check the zipper in the plating on the underside of the seats. Connect the inflator and start filling with air.

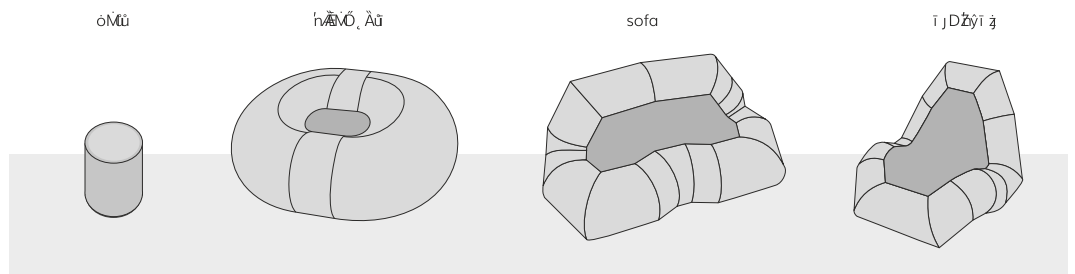

5 Properly tensioned fabric will be the signal to finish pumping. Tighten the valve caps and place/set the product in the target location.

NEEDED



hand pump or electric

CONSTANT PRESSURE ARMCHAIR | SOFA | PUFF VENTO®

INCLUDED



x 1


transport bag




x 1

velve key

DISASSEMBLY INSTRUCTIONS

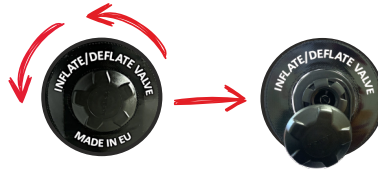

1 Unscrew the nuts of the inflation valves located at the bottom of the seats.

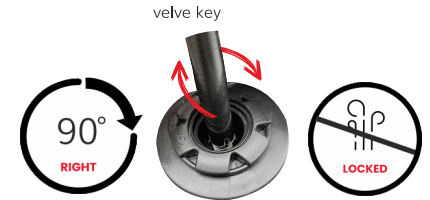


2 Unlock the valve by turning the diaphragm needle about 90° to the left using the key and start pumping out the air.

3 Fold and pack the product into a dedicated carrying case.

INSTRUCTIONS OF USE

1. Please read the product assembly/disassembly instructions before assembly.
2. When transporting, setting up and assembling the product, take special care to avoid damage to the product or injury during assembly or use.
3. Before disassembling the product, ensure that there are no sharp objects, tools, etc. with sharp edges in the area where the product will be assembled.
4. If using an electric pump, check the condition of the wires before connecting to avoid electric shock.
5. To ensure the safety of users, avoid placing the product in walkways. Improper placement may create a risk of tripping and injury.
6. During rain or snowfall, excess water/snow should be systematically removed from the product.
7. Any soiling should be removed immediately with a damp cloth and warm water without the use of detergents. The use of high-pressure cleaners is prohibited.
8. The product should be cleaned and dry before disassembly. If, due to weather or other circumstances, the product is assembled wet and dirty, it should be disassembled again as soon as possible, dried and cleaned.
9. The product should be stored in a dry and clean place. Translated with DeepL.com (free version)

NEEDED



hand pump or electric



risk of ignition following contact with a fire or ignition source



maximum load up to 100kg